



HIGH-END TRADITIONAL SHINGLES • Superior quality high grade bitumen fibreglass shingle




>>> *Diamant® (31) Slate*



HIGH-END TRADITIONAL SHINGLES • Superior quality high grade bitumen fibreglass shingle

Your Benefits:

- Superior quality high grade bitumen fibreglass shingle
- Higher bitumen content
- Available in a wide range of shapes and colours
- Exceeds the most stringent worldwide standards

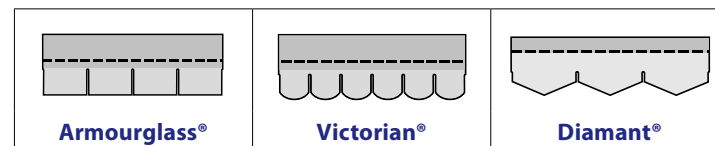

Length (EN 544)	1000 mm (± 3)	1000 mm (± 3)	1000 mm (± 3)
Width (EN 544)	336 mm (± 3)	336 mm (± 3)	284 mm (± 3)
Weight (slope > 25°)	± 10,9 kg/m ²	± 10,4 kg/m ²	± 10,5 kg/m ²
Coverage/bundle	max. 3 m ²	max. 3 m ²	max. 3 m ²
Shingles/bundle	21	21	27
Bundles/pallet	48	48	42

Granule adhesion (EN 12039)	max. 1,2 g	max. 1,2 g	max. 1,2 g
Tensile length* (EN 12311-1)	1000 N/50 mm	1000 N/50 mm	1000 N/50 mm
Tensile width* (EN 12311-1)	700 N/50 mm	700 N/50 mm	700 N/50 mm
Elongation length* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Elongation width* (EN 12311-1)	3,00 %	3,00 %	3,50 %
Nail tear resistance* (EN 12311-1)	160 N	160 N	160 N

External fire performance	B _{roof} T ₁	B _{roof} T ₁	B _{roof} T ₁
Reaction to fire	Class E	Class E	Class E

* Registered average values



IKO Sales International NV

I.Z. Ravenshout 3.9 74 • Truibroek 74 • 3945 Ham • Belgium

T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30 • E support@iko.be • www.iko.be

IKO
The Shingles Expert

The information is subject to change without prior notice.

Consult our shingle overview leaflet or website www.iko.be for colour availability of the products and application instructions